



CIRCULAR Circular studs

03/07/2014

STANDARD MATTING

FEATURES

- Non-slip surface.
- Circular studs.
- Thermal and acoustic insulation.

ADVANTAGES

- ▶ Prevents the risk of persons falling
- ▶ Visibility
- ▶ Easy to clean and low maintenance
- ▶ Noise, vibration, and cold propagation reduction

BENEFITS

- ▶ Safety
- ▶ Cleanliness, hygiene
- ▶ Comfort
- ▶ Economy

APPLICATIONS

Flooring and matting for halls, corridors, ramps, stairs, elevators, in industrial premises and for indoor installations.


WARNING: for public areas where more demanding safety is required, we advise the use of our fire resistant and low and non toxic smoke emission qualities.

www.trelleborg.com/elastomerlaminates

MECHANICAL, PHYSICAL AND CHEMICAL PROPERTIES

	Measured characteristics	Standard	Value	
MECHANICAL	Rubber compound		SBR	
	Hardness	ASTM D2240	70 ± 5	Shore A
	Abrasion resistance (5 N)	ISO 4649	≤ 250	mm ³

PROFILE

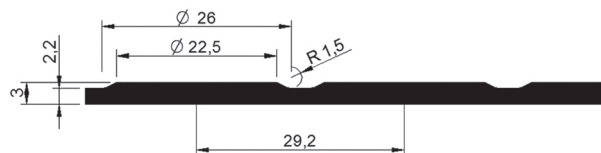

Circular studs (MC 2K1)

DIMENSIONS

Colour	Thickness (mm)		Width (mm)		Length (m)		Weight (kg/m ²)	Pattern
●	3	± 0.3	1000	± 2 %	10	± 2 %	4	MC 2K1
● ●	3	± 0.3	1200	± 2 %	10	± 2 %	4	MC 2K1

Depending on the manufacturing process there could be differences in some tonalities of the roll colours. Colours of the sample kits and catalogues has to be considered as indicative.

IDENTIFICATION

Branding	Without.
Back face	Fabric impression.
Packaging	Rolled on cardboard tube Ø 80 mm.
Wrapping	Black polyethylene film.
Labelling	Self-adhesive label indicating product name, dimensions, area in m ² , nominal weight, and product code to allow product traceability.