



GROOVED Grooved matting

03/07/2014

STANDARD MATTING

FEATURES

Non-slip surface.
Ribbed profiles.

ADVANTAGES

- ▶ Non-slippery
- ▶ Thermal and acoustic insulation
- ▶ Noise, vibration, and cold propagation reduction

BENEFITS

- ▶ Safety
- ▶ Comfort
- ▶ Economy

APPLICATIONS

Cutting pieces for vehicles step treads, shelves, or racks covers.

Cutting plates for protection of walls, columns, staircases, step stools, car trunks or vessels corridors.

Indoor installations.

www.trelleborg.com/elastomerlaminates



MECHANICAL, PHYSICAL AND CHEMICAL PROPERTIES

	Measured characteristics	Standard	Value	
MECHANICAL	Rubber compound		SBR	
	Hardness	ASTM D2240	70 ± 5	Shore A
	Abrasion resistance (5 N)	ISO 4649	≤ 250	mm ³


PROFILE



Fine triangular ribbed (MT)

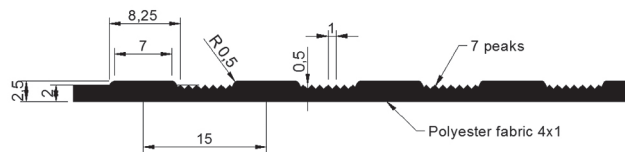

Rectangular ribbed (MR)



Wide ribbed (MG)

DIMENSIONS

Colour	Thickness (mm)		Width (mm)		Length (m)		Weight (kg/m ²)	Pattern
●	3	± 0.3	1000	± 2 %	10	± 2 %	3.6	MT
●	3	± 0.3	1200	± 2 %	10	± 2 %	3.6	MT
●	2.5	± 0.3	1500	± 2 %	15	± 2 %	3.3	MR
●	5.8	± 0.5	1000	± 2 %	10	± 2 %	6.9	MG
●	5.8	± 0.5	1200	± 2 %	10	± 2 %	6.9	MG

IDENTIFICATION

Branding	Without.
Back face	Fabric impression.
Packaging	Rolled on cardboard tube Ø 80 mm.
Wrapping	Black polyethylene film.
Labelling	Self-adhesive label indicating product name, dimensions, area in m ² , nominal weight, and product code to allow product traceability.